


TECHNICAL SPECIFICATIONS

MACHINE	POUCH SIZE MIN.	POUCH SIZE MAX.	GUSSET MIN. /MAX.	MAX. VOLUME	OUTPUT P.P.M.	FILLING STATION	POUCH TYPE
H-320 S	120 x 150	320 x 300	—	2000 c.c.	up to 70	3	Flat
H-320 D	90 x 100	160 x 300	—	750 c.c.	up to 140	3	Flat
H-320 FE	120 x 150	320 x 300	40 - 120	3000 c.c.	60 - 65	3	Stand up
H-320 FED	80 x 100	160 x 300	40 - 120	1000 c.c.	120 - 130	3	Stand up
H-320 FET	80 x 100	105 x 300	40 - 70	750 c.c.	180 - 195	3	Stand up
H-320 FEQ	70 x 100	80 x 300	40 - 50	250 c.c.	240 - 260	3	Stand up
H-320 /3	50 x 50	105 x 240	—	200 c.c.	up to 240	1	Flat
H-320 /4	50 x 50	80 x 240	—	100 c.c.	up to 320	1	Flat

Final speed will depend on product and film characteristics

Noise level < 70-80 Db	Max. Reel dimensions 800/600 mm. Ø	Electrical consumption 18 Kw	Reel core 76 (3")/152 (6") mm. Ø	Air consumption 150-800 l/min	Air pressure 6 bar
---------------------------	---------------------------------------	---------------------------------	-------------------------------------	----------------------------------	-----------------------

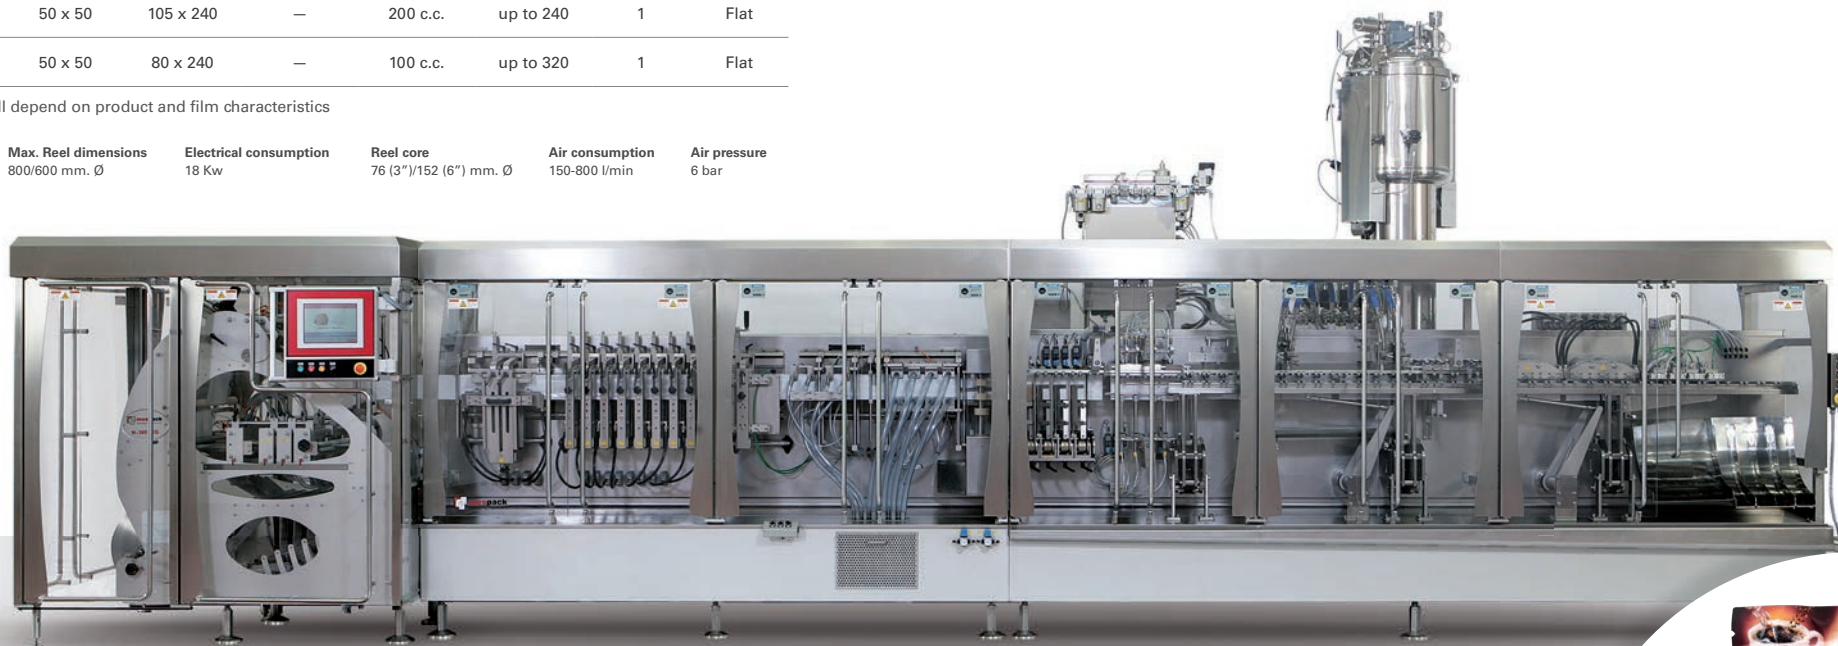

TRIPLEX & QUADRUPLIX CAPABILITIES

The technology used incorporates both, simplicity and heavy duty construction, to enable maximum efficiency and minimum downtime.

Flexibility is another main aspect, as using the same machine it is possible to make a wide range of different pack presentations.

Change over simplicity and rapidity from one product to another or from size to size, makes Mespack machines unique with respect to any existing competitive machine.

